


Custom high-frequency transformer



TYPE:TER 35/41

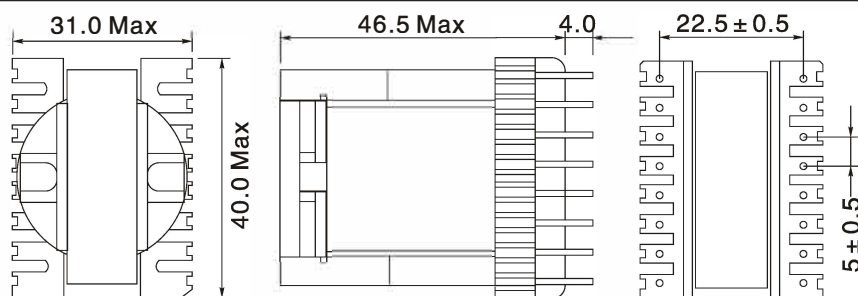

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	15W	C1	0.82	mm ⁻¹
P3	100kHz	30W	Ae	107	mm ²
P3	300kHz	90W	Le	90.8	mm
			Ve	9716	mm ³

TYPE:TER 35/41H


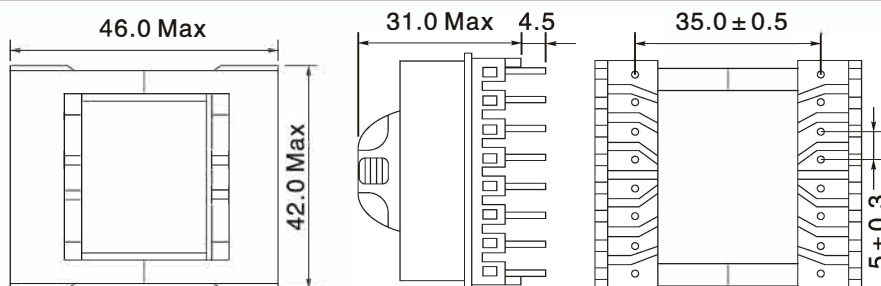


ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	15.0W	C1	0.82	mm ⁻¹
P3	100kHz	30.0W	Ae	107.0	mm ²
P3	300kHz	90.0W	Le	90.8	mm
			Ve	9716	mm ³

Custom high-frequency transformer


TYPE:TER 40/42H

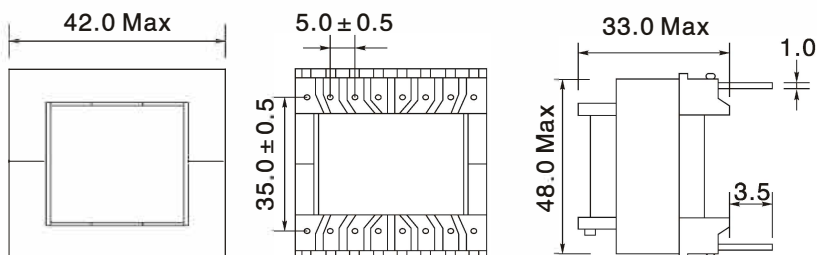

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	20W	C1	0.60	mm ⁻¹
P3	100kHz	40W	Ae	158.0	mm ²
P3	300kHz	110W	Le	95.6	mm
			Ve	15100	mm ³

TYPE:TER 40/42

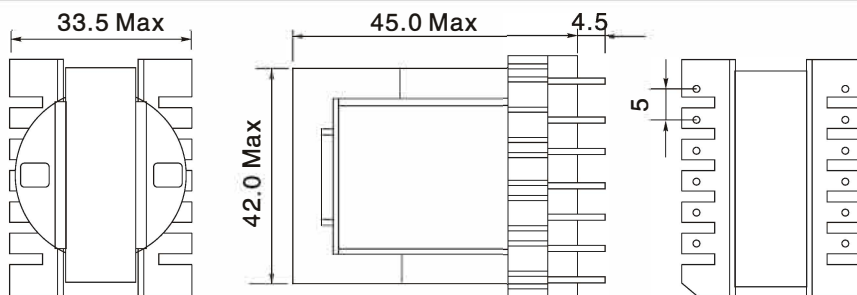


ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	20W	C1	0.74	mm ⁻¹
P3	100kHz	40W	Ae	125	mm ²
P3	300kHz	110W	Le	92.1	mm
			Ve	11510	mm ³

Custom high-frequency transformer


TYPE:TPO 20/20

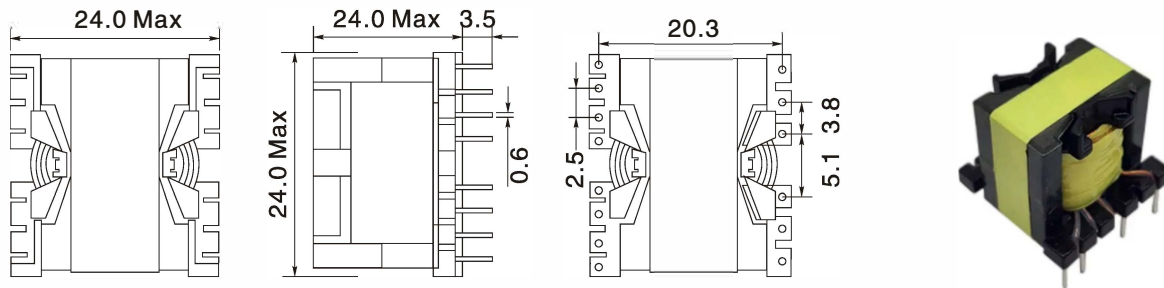

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	26W	C1	0.74	mm ⁻¹
P3	100kHz	52W	Ae	61.4	mm ²
P3	300kHz	80W	Le	45.4	mm
P3	500kHz	100W	Ve	2790	mm ³

TYPE:TPO 26/20

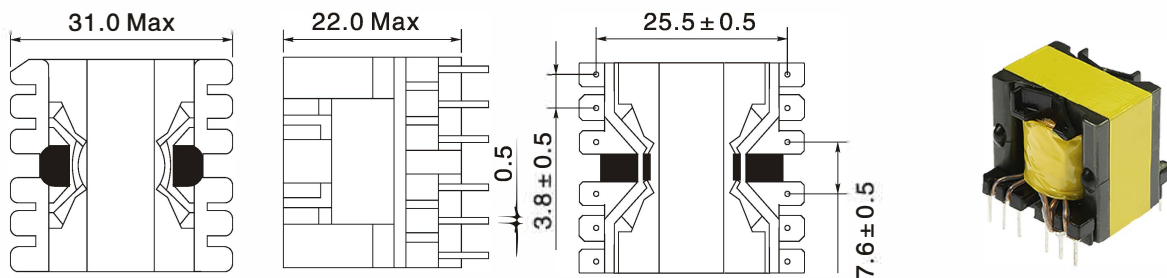


ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	50W	C1	0.37	mm ⁻¹
P3	100kHz	117W	Ae	120.1	mm ²
P3	300kHz	152W	Le	44.7	mm
P3	500kHz	182W	Ve	5372	mm ³

Custom high-frequency transformer


TYPE:TPO 26/25

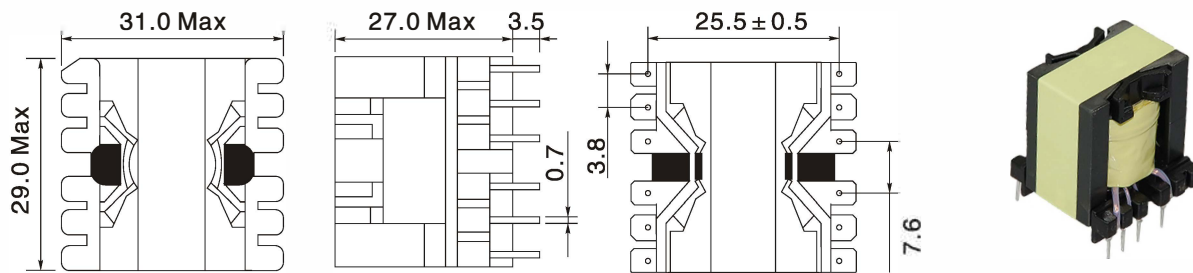

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	70W	C1	0.44	mm ⁻¹
P3	100kHz	130W	Ae	121.4	mm ²
P3	300kHz	180W	Le	131.1	mm
P3	500kHz	210W	Ve	6605	mm ³

TYPE:TPO 32/20

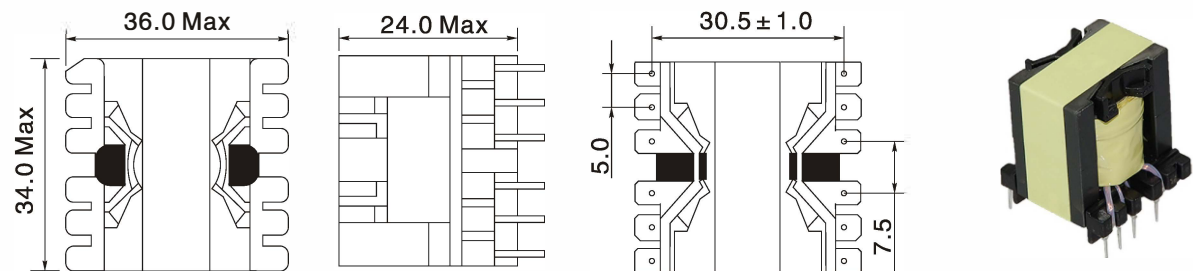


ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	80W	C1	0.33	mm ⁻¹
P3	100kHz	160W	Ae	163.6	mm ²
P3	300kHz	210W	Le	140.1	mm
P3	500kHz	260W	Ve	8276	mm ³

Custom high-frequency transformer


TYPE:TPQ 32/30

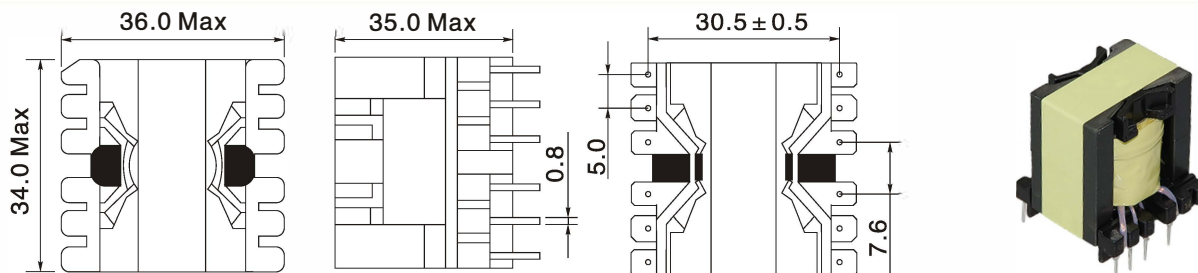

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	100W	C1	0.46	mm ⁻¹
P3	100kHz	190W	Ae	161.0	mm ²
P3	300kHz	250W	Le	74.6	mm
P3	500kHz	320W	Ve	12.0	cm ³

TYPE:TPQ 35/35

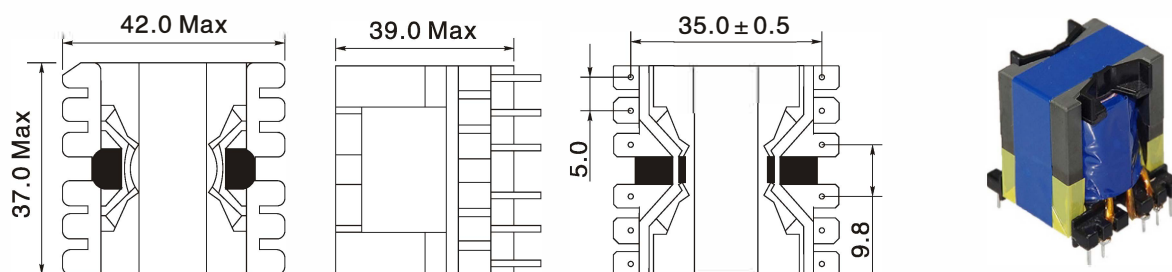


ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	120W	C1	0.45	mm ⁻¹
P3	100kHz	240W	Ae	196.0	mm ²
P3	300kHz	300W	Le	87.9	mm
P3	500kHz	380W	Ve	17.3	cm ³

Custom high-frequency transformer


TYPE:TPQ 40/40

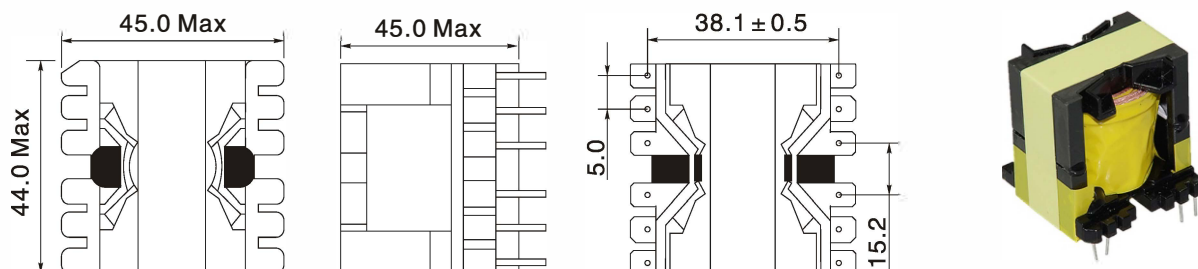

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	140W	C1	0.50	mm ⁻¹
P3	100kHz	280W	Ae	201.0	mm ²
P3	300kHz	360W	Le	169.7	mm
P3	500kHz	500W	Ve	20.5	cm ³

TYPE:TPQ 50/50

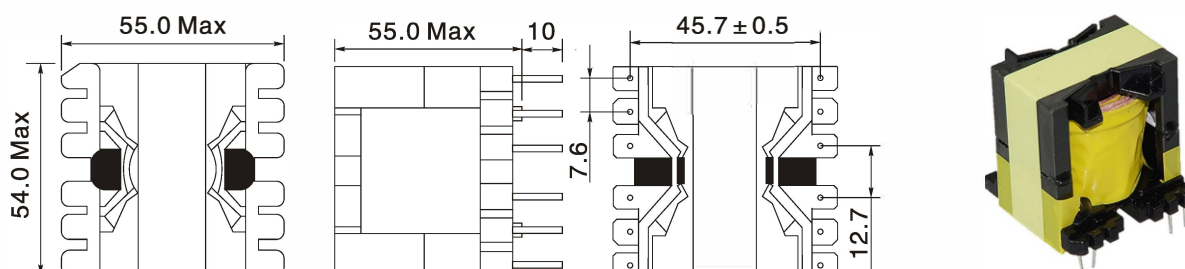


ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	160W	C1	0.36	mm ⁻¹
P3	100kHz	310W	Ae	320	mm ²
P3	300kHz	450W	Le	114.6	mm
P3	500kHz	800W	Ve	36.67	cm ³

Custom high-frequency transformer


TYPE:TRM 4

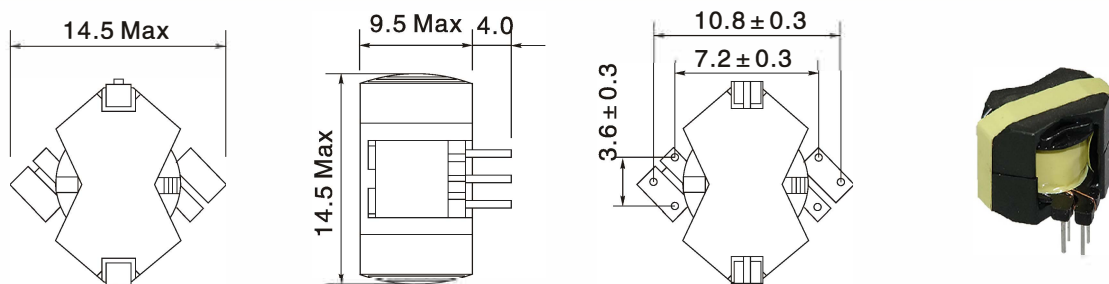

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	3W	C1	1.62	mm ⁻¹
P3	100kHz	6W	Ae	13.9	mm ²
P3	300kHz	9W	Le	22.5	mm
P3	500kHz	22W	Ve	313	mm ³

TYPE:TRM 5

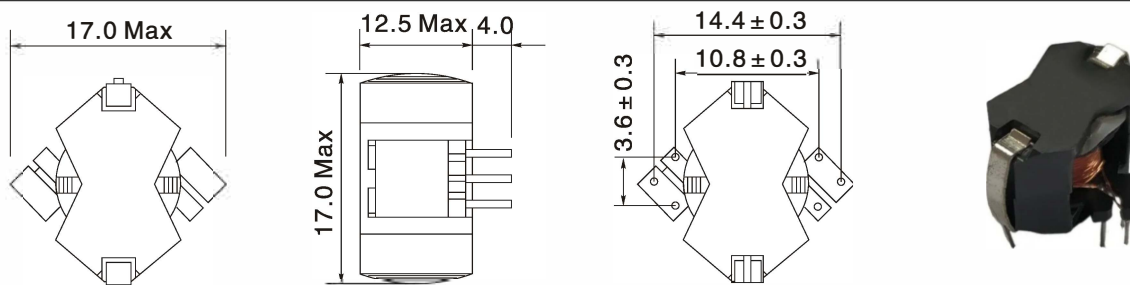

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	5W	C1	1.03	mm ⁻¹
P3	100kHz	9W	Ae	23.2	mm ²
P3	300kHz	18W	Le	23.9	mm
P3	500kHz	25W	Ve	555	mm ³