


Custom high-frequency transformer


TYPE:TRM 6

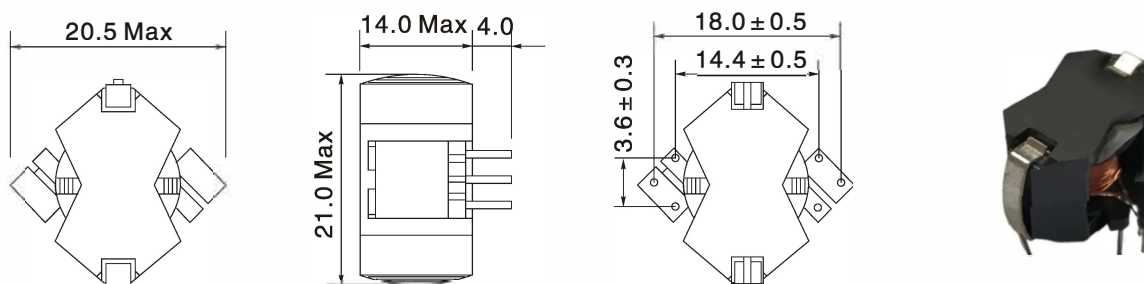

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	8W	C1	0.79	mm ⁻¹
P3	100kHz	15W	Ae	37.1	mm ²
P3	300kHz	25W	Le	29.7	mm
P3	500kHz	32W	Ve	1097	mm ³

TYPE:TRM 8

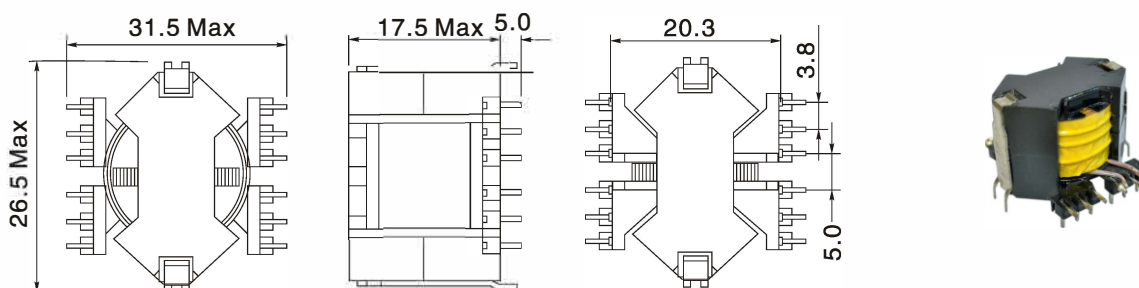


ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	16W	C1	0.59	mm ⁻¹
P3	100kHz	32W	Ae	64.0	mm ²
P3	300kHz	50W	Le	38.0	mm
P3	500kHz	70W	Ve	2400	mm ³

Custom high-frequency transformer


TYPE:TRM 10

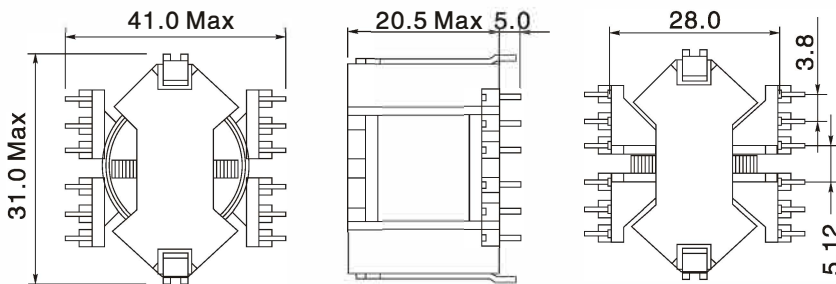

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	26W	C1	0.34	mm ⁻¹
P3	100kHz	50W	Ae	102	mm ²
P3	300kHz	75W	Le	35.1	mm
			Ve	3.597	cm ³

TYPE:TRM 14

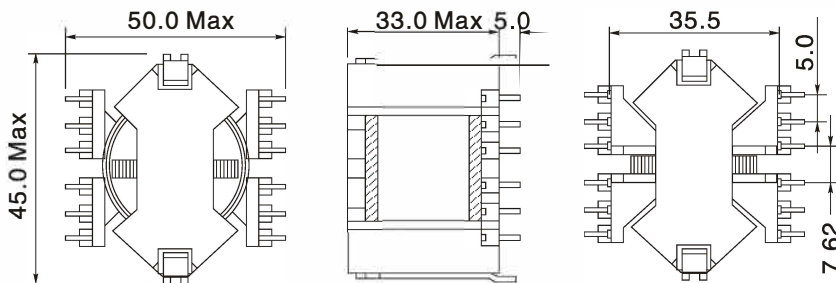


ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	52W	C1	0.26	mm ⁻¹
P3	100kHz	100W	Ae	202.7	mm ²
P3	300kHz	150W	Le	53.0	mm
			Ve	10.74	cm ³

Custom high-frequency transformer


TYPE:TETD 34

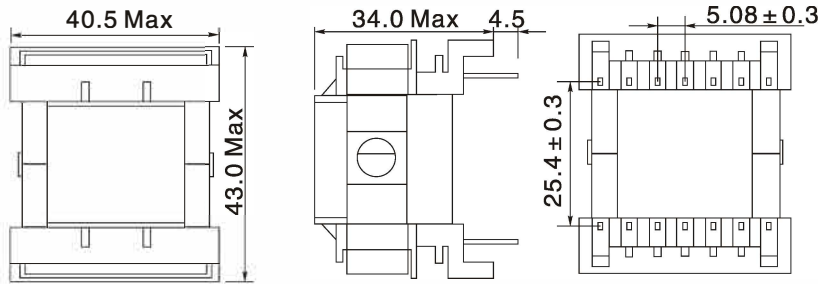

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	15W	C1	0.82	mm ⁻¹
P3	100kHz	30W	Ae	96.6	mm ²
P3	300kHz	90W	Le	79.1	mm
			Ve	7635	mm ³

TYPE:TETD 39

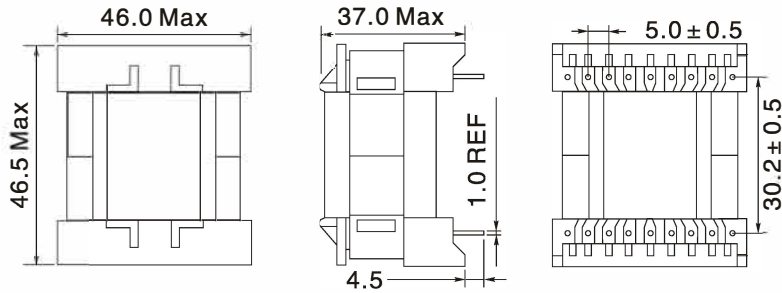


ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	20W	C1	0.74	mm ⁻¹
P3	100kHz	45W	Ae	125	mm ²
P3	300kHz	120W	Le	92.1	mm
			Ve	11.51	cm ³

Custom high-frequency transformer


TYPE:TETD 39

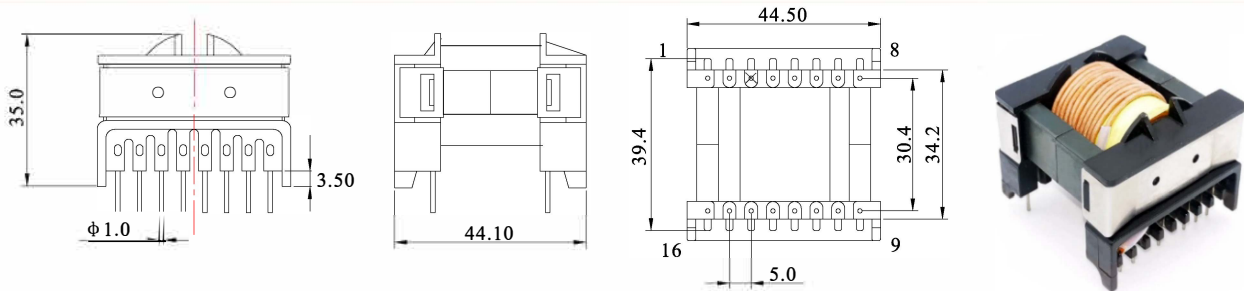

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	20W	C1	0.74	mm ⁻¹
P3	100kHz	45W	Ae	125	mm ²
P3	300kHz	120W	Le	92.1	mm
			Ve	11.51	cm ³

TYPE:TETD 44

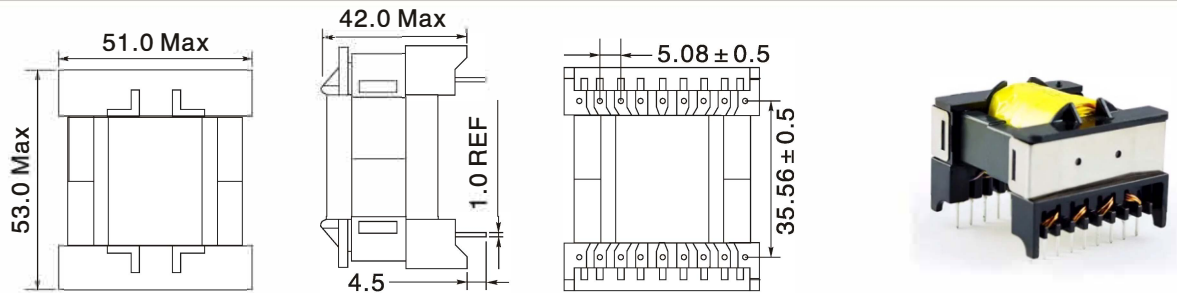


ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	45W	C1	0.60	mm ⁻¹
P3	100kHz	80W	Ae	172	mm ²
P3	300kHz	130W	Le	103.7	mm
			Ve	17.826	cm ³

Custom high-frequency transformer


TYPE:TETD 49

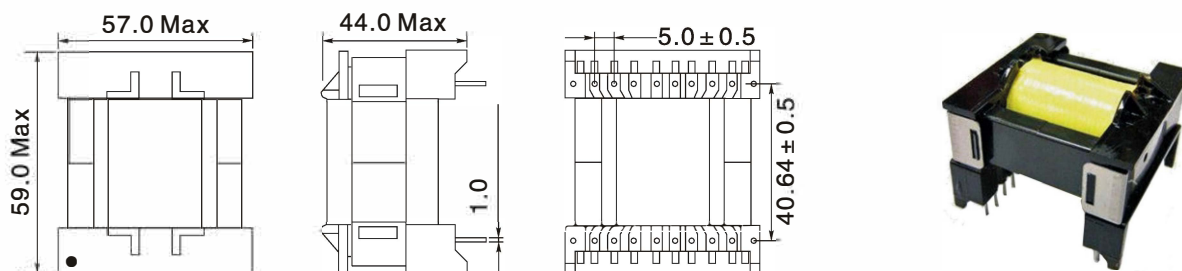

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	70W	C1	0.53	mm ⁻¹
P3	100kHz	140W	Ae	238	mm ²
P3	300kHz	250W	Le	114.6	mm
			Ve	24.32	cm ³

TYPE:TETD 59

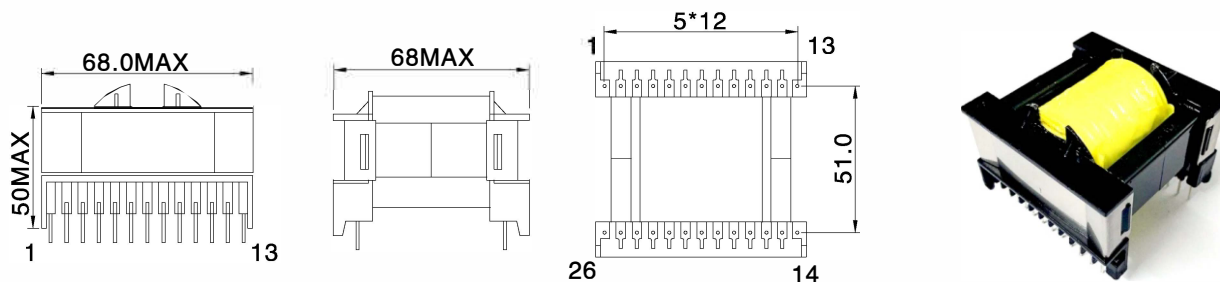

ELECTRICAL CHARACTERISTICS(at 25°C):

Transformer Characteristics Parameters			Magnetic Core Structure Parameters		
Material	Frequency Range	Reference Power	Items	Size	Unit
P3	50kHz	140W	C1	0.38	mm ⁻¹
P3	100kHz	260W	Ae	364.2	mm ²
P3	300kHz	500W	Le	141.0	mm
			Ve	51.5	cm ³